A.O.SMITH MANIFOLD KITS
GAS FIRED TANK-TYPE WATER HEATERS

For 120,000 BTU/H Input and Larger Heaters

Precision cut type "L" all copper A. O. Smith manifold kits assure water flow balance of all units. Without this balance, the full water heating and storage potential of the system cannot be achieved. Plus, the units with higher water flow may have shortened product life.

Dimensions shown are for minimum space occupied by complete assemblies. Service space in front of the units must be added.

Manifolds do not include shutoff valves.

ALL DIMENSIONS
IN INCHES

INSERT A

INSTALL THERMAL EXPANSION TANK IF CHECK VALVE OR PRESSURE REDUCING VALVE IS USED IN SUPPLY

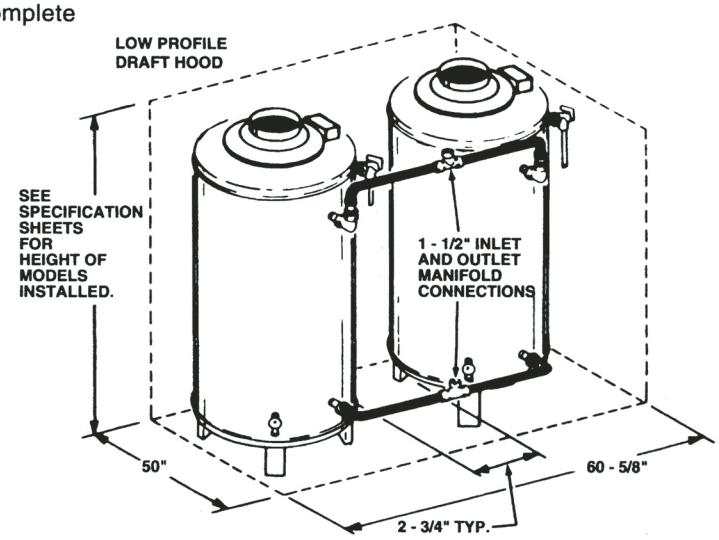

TWO UNIT MANIFOLD KIT (PART NO. 78692.1)

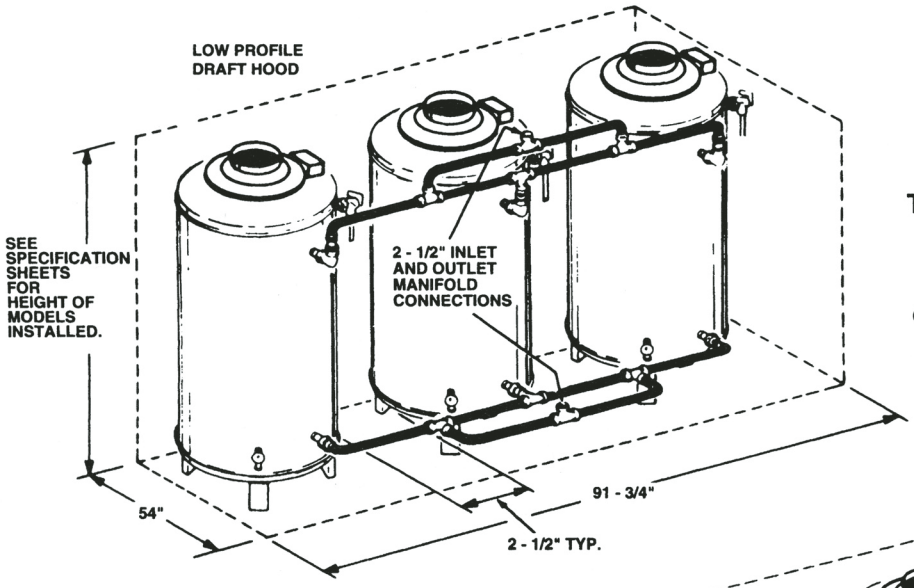

THREE UNIT MANIFOLD KIT (PART NO. 78693.1)

CAUTION: IF BUILDING COLD WATER SUPPLY HAS A BACKFLOW PREVENTER CHECK VALVE OR WATER METER WITH CHECK VALVE, PROVISIONS FOR THERMAL EXPANSION OF WATER IN THE HOT WATER SYSTEM MUST BE PROVIDED

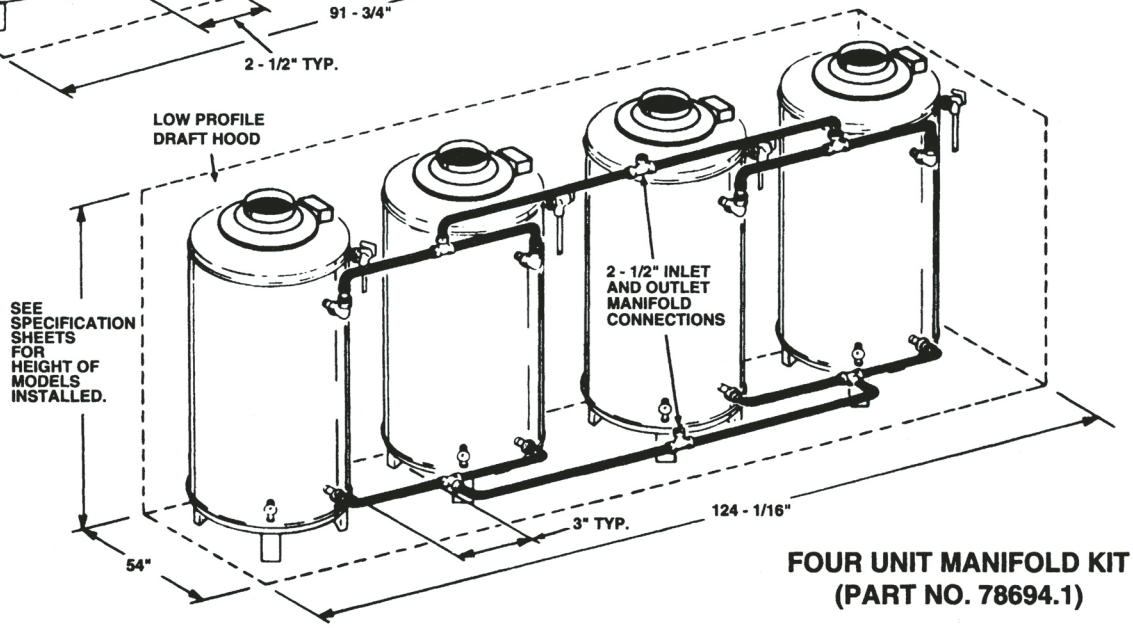

FOUR UNIT MANIFOLD KIT (PART NO. 78694.1)

© A. O. SMITH CORP. 1995

Downloaded from www.Manualslib.com manuals search engine